






Assembly

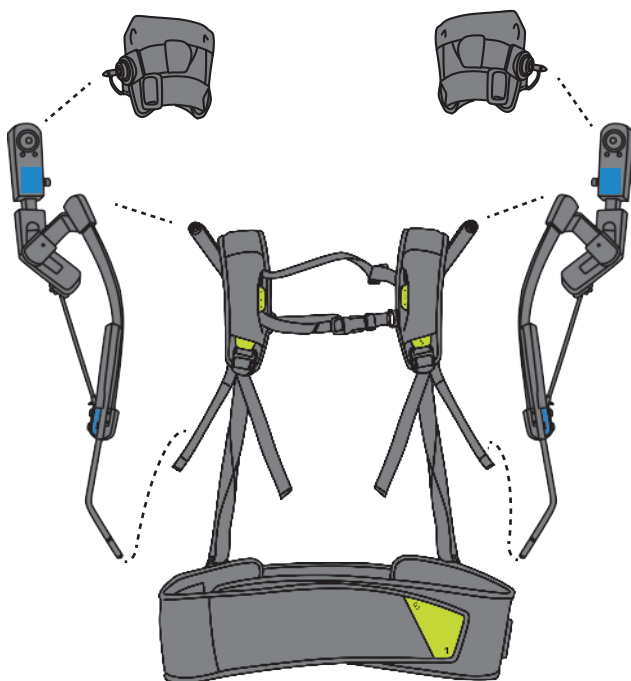

Front view





Click the arm cups in the correct device arm




Put the loops on the device base frames

Rear view

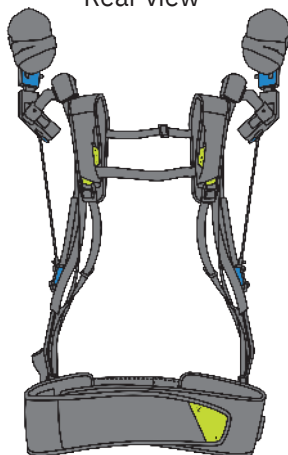

Put the plastic connectors on the top of the frames



Put the base frames in the belt sockets






Configuration Steps


Explanation measurement

Sizing


Belt Sizing




Height Sizing



1




2





3

Arm Cup Sizing




Measurement	Arm Cup Size
20-28 cm.	Small
27-35 cm.	Medium
34-42 cm.	Large



Force Adjustment



Body Weight	Force setting
50 kg	1
65 kg	2
80 kg	3
95 kg	4







Putting on

Put on




Put the straps over your shoulder



Make sure it is symmetrical


Strap in



1



2




3

Tighten all the straps

Engage



Pull the arm cup down



Wrap around the arm




Lock it in place




Check Fit


Check harness



Check for symmetrical belt




Shoulder straps loosely on your shoulder



Armcup comfortably halfway around your arm


Check frames



2 fingers clearance above the shoulder



Device hinge on your shoulder



Lift your arms to verify freedom of movement



Warning: Watch out for sharp parts and avoid touching moving parts of the device during use.

Scan the QR code for more information



Contact information:



Scheepsbouwweg 8
Kavel G4
3089 JW Rotterdam



info@skel-ex.com