



Checking the fit


Check harness



Make sure belt is positioned symmetrical




Shoulder straps loosely on shoulders




Best position
Arm cup comfortable halfway around arm


Check FlexFrames



>2
2 Finger clearance above the shoulder



Device centered on shoulders




Check range and supporting force



Warning: Pinch point hazard
Indicated by icon on FlexFrame

Skel-Ex B.V.
Scheepsbouwweg 8, kavel G4
3089 JW Rotterdam
The Netherlands
Tel: 085 - 07 35 790
info@skel-ex.com
www.skelex.com

Assembly

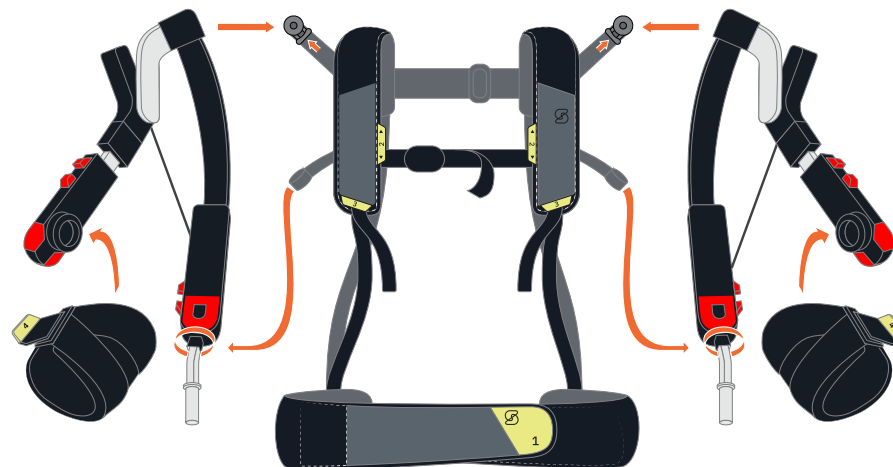

Put the harness loops over the frame tubes

Put the FlexFrames in the hip interfaces

Put the plastic connector on top of the FlexFrames




Click the arm cups in the arms




Sizing | Settings


Belt settings



1




2




3


Height settings



1




2



3


Arm cup selection



1

	Min (cm)	Max (cm)
Small	20	28
Medium	27	35
Large	34	42

2



3


Force settings



1

Body weight (kg)	Adjustment setting
50	1
65	2
80	3
95	4


2




3

Donning | Putting on


Belt



Put device over your shoulders




Make sure belt is positioned symmetrical




Tighten belt


Shoulders



Close and tighten chest strap




Tighten shoulder straps



Check the range of motion by moving your arms


Arms



Pull arm cup down



Wrap strap around arm



Lock GripLabel in place